




**NEW**  
**GUARDIAN® 2.0**  
Forced Air Heaters


60  
100  
250  
325

The best value in high quality,  
dependable poultry heating.

New spark igniter -  
no separate flame sense  
and new igniter position for  
Hot Surface making it easier  
to work on.

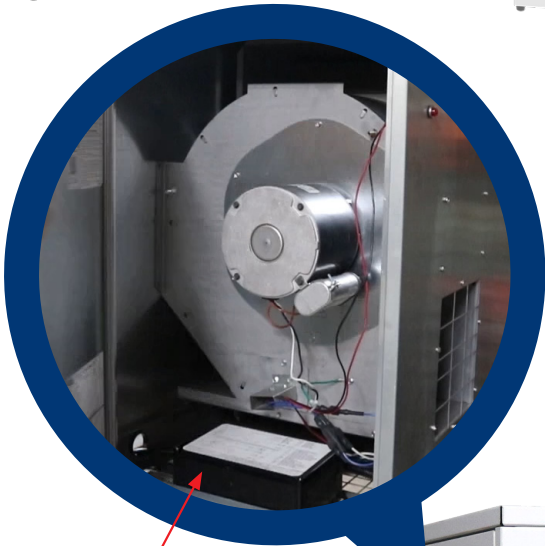

Waterproof control box  
to protect control board



Diagnostic light on outside  
for better visibility

Improved locks provide  
a more finished look and  
better locking capability

Full doors  
for more protection  
during power washing

Doors fit internal  
to wrapper



Feet added at base for  
hardware clearance

No sharp edges

# Guardian<sup>®</sup> 2.0 Forced Air Heater Specifications

Model:	Guardian 60 2.0	Guardian 100 2.0	Guardian 250 2.0	Guardian 325 2.0
Rating:				
Maximum Input (Btuh)	60,000	100,000	250,000	325,000
Minimum Input (Smart Sense)	60,000	50,000 (25,000)	160,000 (65,000)	200,000
Heater Configuration:				
Hot Surface Ignition	AW060	AW100	AW250	AW325
Spark Ignition	AD060	AD100	AD250	-
Pilot Ignition	-	-	AB250	-
Smart Sense <sup>®</sup> (Auto Modulating)	-	Available	Available	-
Fuel Consumption (max.):				
Liquid Propane Gas (lbs./hr.)	2.8	4.6	11.6	15.1
Natural Gas (cu. ft./hr.)	60.0	100	250	325
Heated Air Output (CFM)	240	400	1,050	1,700
Inlet Gas Supply Pressure				
Liquid Propane Gas min. / max. (in. W.C.)	11.0 / 13.5	11.0 / 13.5	11.0 / 13.5	11.0 / 13.5
Natural Gas min. / max. (in. W.C.)	7.0 / 13.5	7.0 / 13.5	7.0 / 13.5	7.0 / 13.5
Electrical Supply (Volts / Hz / Phase):	120/ 60 / 1	120 / 60 / 1	120/60/1	240/60/1
Amps (Starting / Cont. Oper.)				
Hot Surface Ignition	3.3 / 1.0	4.8 / 1.5	12.2 / 4.0	7.1 / 3.2
Spark Ignition	3.3 / 1.0	4.8 / 1.5	12.2 / 4.0	-
Pilot Ignition	-	-	7.3 / 4.5	-
Cabinet Material	Tri-shield Coating	Tri-shield Coating	Galvanized Steel*	Galvanized Steel
Dimensions (in.):				
Length	22.5	27	30.6	35.0
Width	12.75	14.0	18.0	22.0
Height	18.0	20.0	28.0	30.0
Net Weight (lbs.)	52.0	67.0	105.0	131.0
Shipping Weight (lbs.)	57.0	70.0	126.0	160.0
Accessories:				
Chain Hanging Kit	Optional	Optional	Optional	Optional
Air Diverter	Optional	Optional	Optional	Optional
Second Stage Regulator	Optional	Optional	Optional	Optional
Thermostat	Optional	Optional	Optional	Optional
Sediment Trap	Standard	Standard	Standard	Standard
Gas Hose (10ft.)	Optional	Optional	Optional	Optional
Installation Options:				
Indoor Mount	Yes	Yes	Yes	Yes
Outdoor Mount	Yes	Yes	Yes	Yes
CSA Certified	Yes	Yes	Yes	Yes

\* Exclusive Tri-shield coating available for AD & AW heaters. Tri-shield coating consists of three unique protective layers including: a non-corrosive hot-dipped galvanized steel, an oven-cured epoxy primer and a baked, thermosetting polyester.



## Innovative Climate Solutions

411 Mason Street, Onalaska, WI 54650  
 800 345 7200 (toll free) or 608 783 5691  
 608 783 6115 (fax)  
 info@lbwhite.com | www.lbwhite.com

## Your L.B. White Dealer:

**CA RESIDENTS:**  
 **WARNING**  
 Cancer and reproductive harm. See  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



© 2024 L.B. White Company  
 All rights reserved.  
 All specifications are subject  
 to change without notice.